
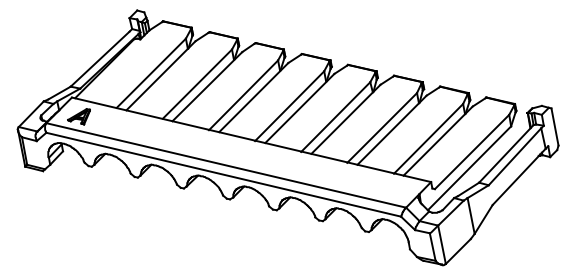


Rev.	DESCRIPTION	DATE	APPD.
1	Change material	2018 8/20	林泰克

Features:

RoHS compliant

- 2 ~ 8 circuits available
- ⚠ ● Material: Nylon 9T, UL 94V-0
- Mates with ALEX 2532-xxS, 2532-xx housings

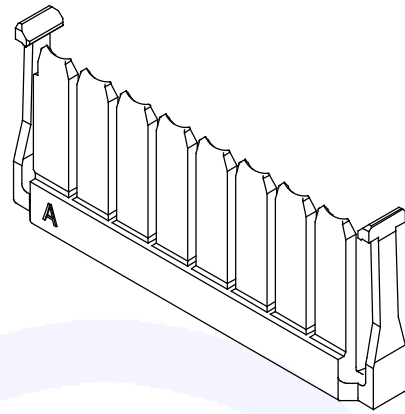

Specification:

- Ambient temperature range: -40°C ~ 105°C

Dimensional Information ( mm )


Circuits	Dim. A	Dim. B
N	2.5 x ( N - 1 )	2.5 x N + 2.7

&& N = 2 ~ 8



Ordering Information

Part No.	Color
2532C-xx-A	Black
2532C-xx-B	Natural

&& xx = 02 ~ 08

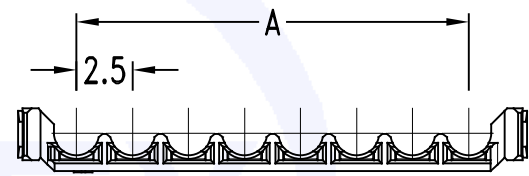

發行  
2018.08.27  
亞式文管

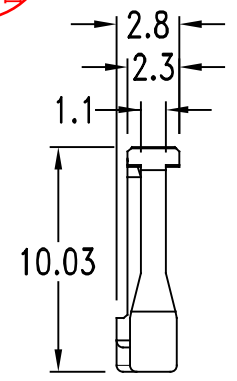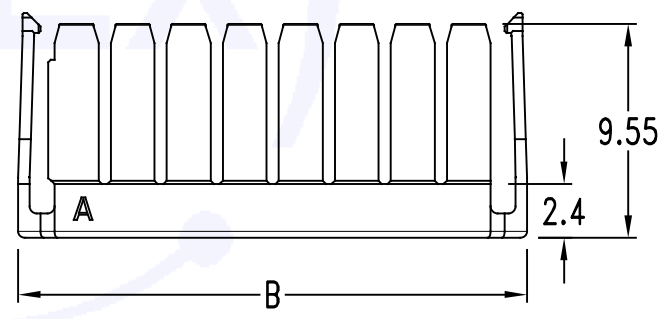

CUSTOMER APPROVAL

UNLESS OTHERWISE SPECIFIED TOLERANCE  
 .000 ± 0.08 ( mm )  
 .00 ± 0.25 ( mm )  
 .0 ± 0.4 ( mm )

UNIT:mm

Material:  
Finish:  
Q'ty:

APPROVAL

DRAWN: 張惇捷 2017 5/17  
 DESIGNED: 林泰克 2017 5/17  
 CHECKED: 劉宏彬 2017 5/17  
 APPROVED: 劉宏彬 2017 5/17

DATE



ALEX CONNECTOR CO., LTD.

TITLE: .098"(2.5mm) Terminal Position Assurance Retainer

P/N: 2532C-xx Series

Eng. No.: 2532C-xx00Rx-36